

# Tropitone®



For additional Cabana Club assembly and product care instructions, see [www.tropitone.com](http://www.tropitone.com) and select Product Care.

- ✓ Cabana Club Cleaning and Care
- ✓ Cabana Club Assembly Instructions
- ✓ Cabana Club Woven Panel Attachment

If you have difficulty understanding any of the instructions and need assistance while fastening your components together, please call Tropitone's Customer Service Center at 949-951-2010.

Tropitone Furniture Co., Inc.  
5 Marconi, Irvine, CA 92618

949 951 2010 phone  
[www.tropitone.com](http://www.tropitone.com)

Part # R9T00013  
Revised: 05.09.2013  
©2013 Tropitone Furniture Co., Inc.

# Tropitone®

## Cabana Club Party Lounger & Natural Stone Drink Table Assembly Instructions

Congratulations on the purchase of your Tropitone Cabana Club Party Lounger and Drink Table (optional). Read through all steps before fastening components together.

**CAUTION:** Do not try to lift or flip components with only one person. Components may be heavy and awkward to handle, and may result in injury to persons or damage to property if not lifted properly.

### Tools Required

3/16" Hex Key (Allen Wrench) (2) 7/16" Wrenches  
Safety Glasses

### Party Lounger Parts List (example: connecting 2 modules)

#### **Bottom Connection**

(2) Connector Plates  
(4) 1/4" x 7/8" Hex Head Bolts  
(4) 1/4" Flat Washers  
(4) 1/4" Lock Washers

#### **Upper Connection** *stainless steel*

(2) Connector Plates  
(4) 5/16" x 3/4" Pan Head Screws  
(4) 5/16" Lock Washers



#### **Upper Connection** *aluminum*

(2) Connector Plates  
(4) 5/16" x 2-1/4" Hex Head Cap Screws  
(8) 5/16" Flat Washers  
(4) 5/16" Lock Nuts

### Drink Table Parts List (optional table)

(1) 1/4" x 3/4" Thumb Screw (4) 1/4" x 5/8" Socket Head Screws  
(4) 1/4" Lock Washers



# Party Lounger Assembly

Assembled furniture is heavy; put together at place of use.



## Step 1

Align the Quarter Sections. Attach Connector Plate using 1/4" x 7/8" hex head bolt with flat washer and lock washer into the bottom rear of the first furniture component. Tighten the screw hand tight so the plate can swing.

Swing the connector plates so the slotted hole overlaps the drilled hole. Install a hex head bolt with flat washer and lock washer into the second furniture component – hand-tighten hex head bolts.

Repeat for bottom front of the furniture.


Fully tighten hex head bolts (4 places).

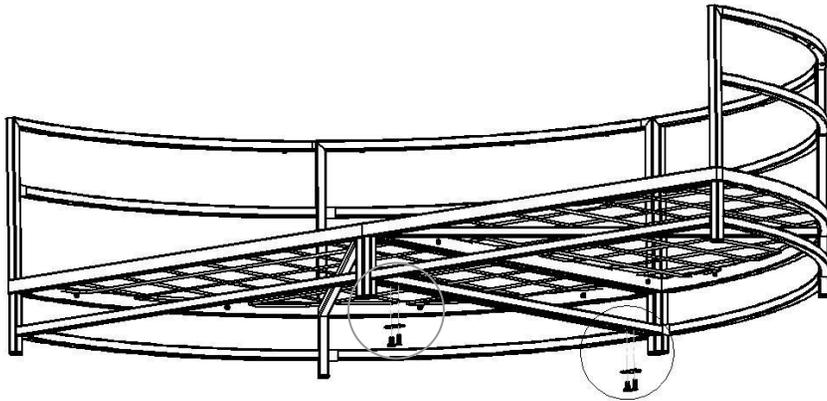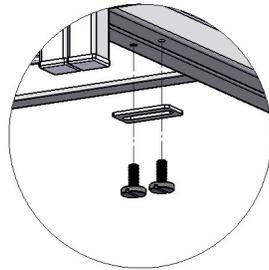

Repeat to attach the 3<sup>rd</sup> and 4<sup>th</sup> sections if these are components are part of the configuration. All section junctions should be retained with two (2) Connector Plates on the bottom of the furniture.

## Step 5

Insure Thumb Screw is loose to allow umbrella insertion. Using two persons, insert 1.5" diameter umbrella pole into table umbrella hole and lower until fully seated. Fully tighten the Thumb Screw against the umbrella pole until the umbrella won't lift or rotate.

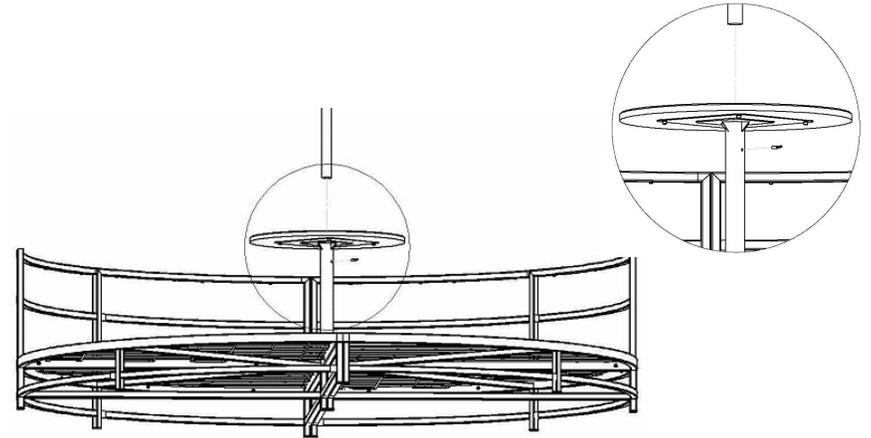

## Step 6

Place the seat cushions with zipper down onto each furniture component. Components with a back have notches in the seat cushion; the notch fits to the frame members.


- Stainless Steel – (rod seat deck grid): Wrap straps around the seat deck grid; snap closed to the tightest snap.
- Aluminum – (wide, flat strap seat deck grid): Wrap straps around seat deck grid; snap closed to the second snap.

Place the back cushions onto each furniture component with the zippers down. Starting at one end of a back cushion, connect the snaps to the underside of the back frame member, working your way to the other end of the back cushion. The short straps closely attach the cushion to the frame.


- ✓ Use your index fingers from both hands to snap the strap to the frame.
- ✗ Fully inserting your hands will move the cushion away from the frame making it difficult to attach the straps.

## Step 4 Drink Table Attachment (continued)

Three Section configuration: Position three (3) Connector Plates as shown below with two connecting the Sections together. Attach the Drink Table.

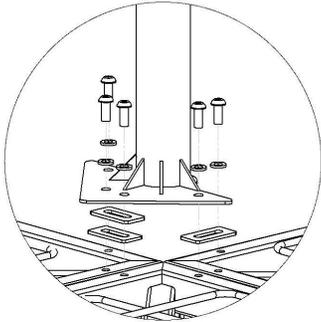


*Stainless Steel:* Install Socket Head Cap Screws with Lock Washers. Fully tighten with Hex Key (5 places).

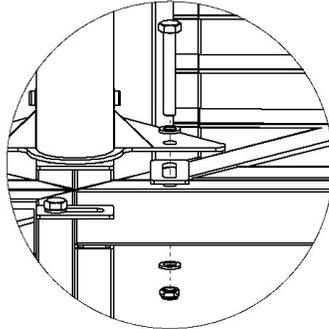


*Aluminum:* Install Hex Head Screws with Flat Washers above and Flat Washers with Lock Nuts underneath. Fully tighten with Wrenches (5 places).

Four Section configuration: Position four (4) Connector Plates as shown to connect all Sections together. Attach the Drink Table.

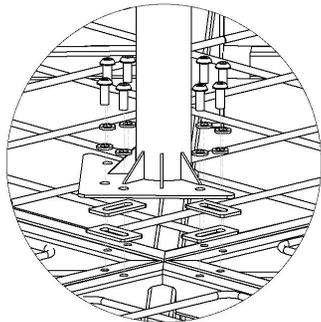

*Stainless Steel:* Install Socket Head Cap Screws with Lock Washers. Fully tighten with Hex Key (8 places).

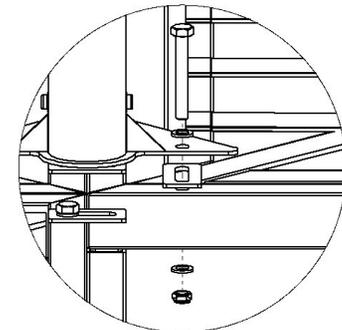

*Aluminum:* Install Hex Head Screws with Flat Washers above and Flat Washers with Lock Nuts underneath. Fully tighten with Wrenches (8 places).

## Step 2 Party Lounger Configuration without Drink Table


Proceed to Step 3 if you're installing the Party Lounger Drink Table option.

Attach Connector Plates(s) into the top front of the components.

### 2 Section configuration

*Stainless Steel:* Fully tighten Pan Head Screw with Lock Washer using the Hex Key (2 places).


*Aluminum (shown):* Fully tighten Hex Head Cap Screw with Flat Washer on top and a Flat Washer with Lock Nut underneath using the wrenches (2 places).

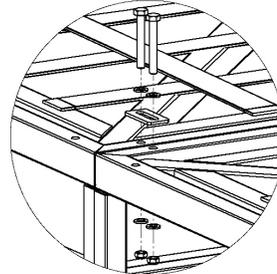

### 3 Section configuration

*Stainless Steel (shown):* Fully tighten Pan Head Screw with Lock Washer using a Hex Key (4 places).


*Aluminum:* Fully tighten Hex Head Cap Screw with Flat Washer on top and a Flat Washer with Lock Nut underneath using the wrenches (4 places).

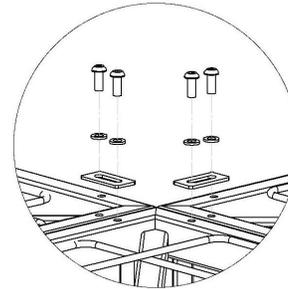

### 4 Section configuration

*Stainless Steel (shown):* Fully tighten Pan Head Screw with Lock Washer using the Hex Key (8 places).

*Aluminum:* Fully tighten Hex Head Cap Screw with Flat Washer on top and a Flat Washer with Lock Nut underneath using the wrenches (8 places).

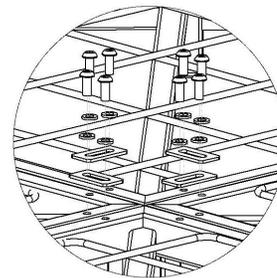


Proceed to Step 6 for final assembly.

### Step 3 Party Lounger Configuration with Drink Table

Prepare a smooth, non-scratch surface (a tarp or pool towels can be placed on your work surface). Place the granite top upside down on prepared work surface.


Place the table base upside down onto the granite top and align the base through holes with the threaded inserts on the top.

Attach the top by installing 1/4" x 5/8" Socket Head Screws with Lock Washers. **Don't fully tighten the screws until all four (4) screws are installed.**

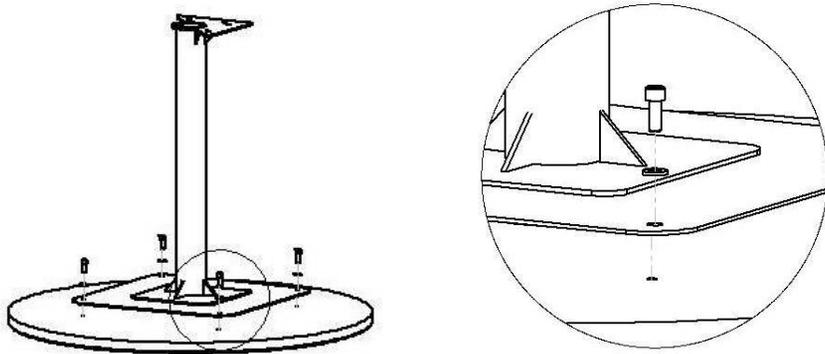

Fully tighten all screws using the Hex Key (4 places).

Insert the thumb screw into table base and tighten a few turns. **Don't fully tighten the screw or it will interfere with the umbrella installation.** If an umbrella won't be installed, fully tighten the screw.

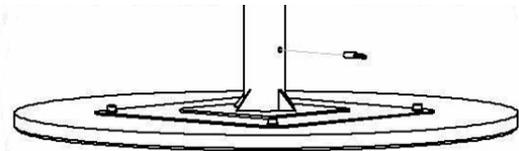

### Step 4 Drink Table Attachment

Two Section configuration: Position three (3) Connector Plates as shown below with one connecting the Sections together. Attach the Drink Table.




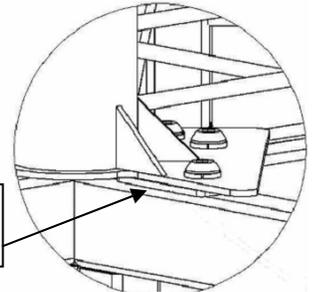


Plate is flush with Party Lounger and Table.

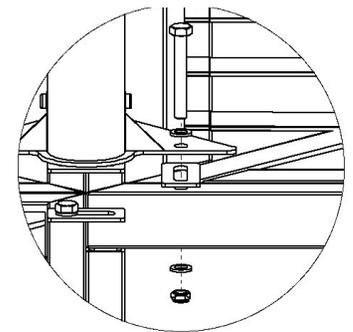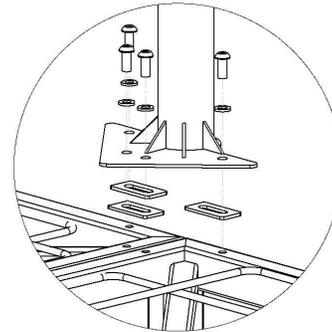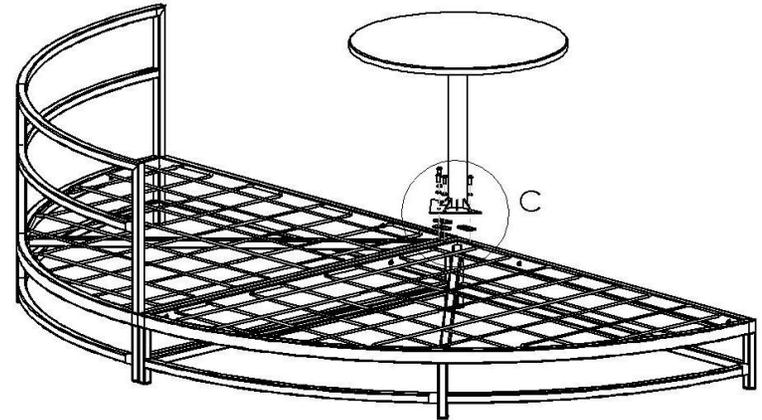

**Stainless Steel:** Install Pan Head Screws with Lock Washers. Fully tighten with Hex Key (4 places).

**Aluminum:** Install Hex Head Cap Screws with Flat Washers above and Flat Washers with Lock Nuts underneath. Fully tighten with Wrenches (4 places).